



Removing UVdatalink information – UL701


Universal Avionics/Unilink Systems

The following are specific instructions for aircraft equipped with Universal Avionics' Unilink system. Information to remove UVdatalink information to avoid communications charges.



From the **DATA 1 / 4** page on the FMS CDU, Main Menu screen select **UNILINK**.

Select **NEXT**.
This will display the **UNILINK
MENU 2 /2** page.

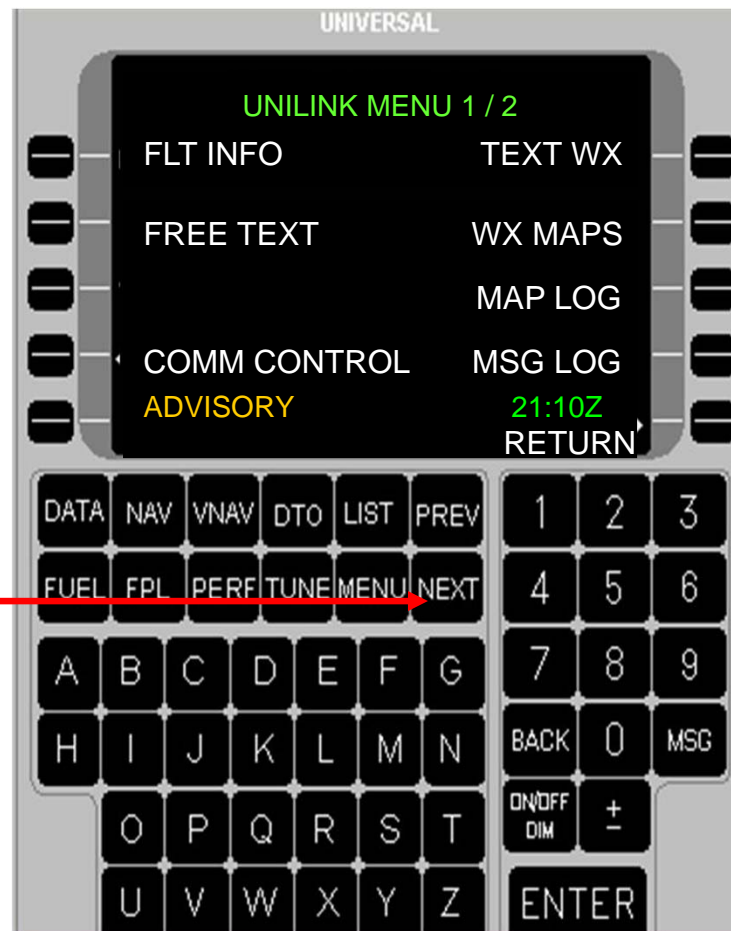

Select **MAINTENANCE**.
This will display the
MAINTENANCE 1 / 2 page.





Select **CONFIG**. This will display the **CONFIG PAGE 1 / 4**.



Select **LSK 1R** to highlight the **Data Entry** field .



Type in the Maintenance password “**456789**” .

Then click on **ENTER**. The number will then change to “**EDIT.**” (***Note: This step must be done to change any information in the Configuration.***).



Select **EDIT**, this will change the word “**EDIT**” to “**STORE**”.

Do not select **STORE** again until all updates complete.

Select **VHF COMM**.
This will display the **VHF
CONFIG 1 / 2** page.



Select **DSP SETUP**.
This will display the **DSP
SETUP** page.



De-Select the **VHF** selection regions.

(Text will be normal not bold)

ARINC

ARINC Europe

SITA

SITA N America

Avicom

Select **Return**. This will display the **VHF CONFIG 1 / 2** page.



Select **Preferred PSP** and
ensure each of following is
not Highlighted

ARINC

ARINC Europe

SITA

SITA N America

Avicom





Select **RETURN**.
This will display the **SYSTEM
CONFIG 1 / 4** page.

Select **NEXT** to display the
SYS CONFIG 2 / 4 page.





Select **AIRCRAFT**.
This will display the **A/C CONFIG** page.



Select **REG NO** to highlight the registration. Select back key, cursor will automatically move to right, hit back key and then click on **ENTER** to remove the aircraft registry into that field.

Select **AIRLINE ID** to highlight “**UV/UVA**” or “**UV/0000**” for Universal Weather & Aviation. Select back key, cursor will automatically move to right, hit back key and then click on **ENTER**, to remove the Airline ID from that field.



Select **TELEPHONE**.
This will display the **TEL
CONFIG 1 / 2** page.


Remove **TEL ACCESS**
NUMBER 17133782777

Set **WX MAPS** and **SUSP**
MSG to **DISABLED**





Select **STORE** and press **3 TIMES**, delaying briefly between each time. This will store the new information in the Unilink .

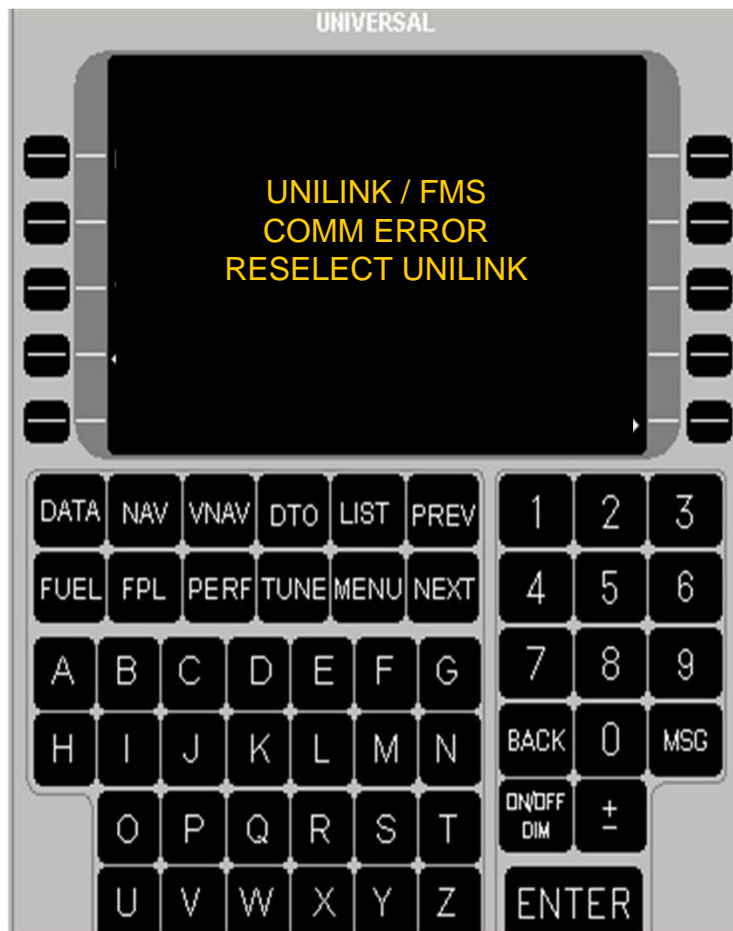

System should reboot providing following alert:

**UNILINK
COMM ERROR
RESELECT UNILINK .**